

ELBOW WALL LIGHT


Technical specifications



Narrow



Wide

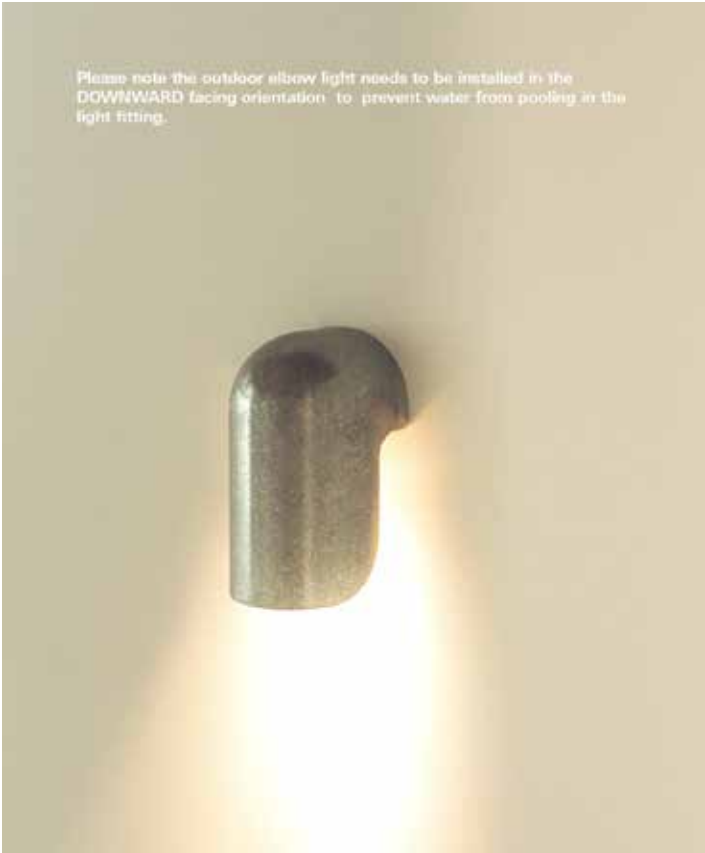


Outdoor

ELBOW WALL LIGHT



OVERALL DIMENSIONS

- I. NARROW
H 205MM x D 95MM x W 100MM
H 8.07IN x D 3.74IN x W 3.93IN
- II. WIDE
H 205MM x D 95MM x W 130MM
H 8.07IN x D 3.74IN x W 5.11IN
- III. OUTDOOR
H 260MM x D 118MM x W 130MM
H 10.23IN x D 4.64IN x W 5.11IN

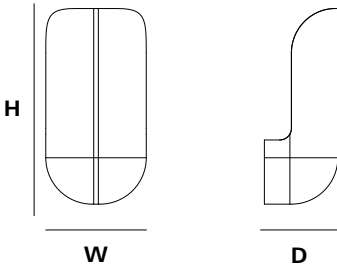

MATERIALS

- I. METAL
- Brass
- Blackened
- Aluminium

WEIGHT

- I. NARROW
- Aluminium
(700G / 24.6oz)
- Brass / Blackened
(1,500G / 52.91oz)
- II. WIDE
- Aluminium
(750G / 26.4oz)
- Brass / Blackened
(1,550G / 56.43oz)
- III. OUTDOOR
- Aluminium
(1,000G / 35.27oz)
- Brass / Blackened
(2,500G / 88.18oz)

PACKAGING

- Recycled Cardboard
H 125MM x L 200MM x W 200MM

CLEANING INSTRUCTIONS

Before cleaning, lighting fixtures must be turned off. Unscrewed the face from the mounting plate for finer cleaning. Whilst cleaning please take care and use the gloves provided.

I. METAL


The metal used for our range oxidise with age and environment, both of which contribute to the evolution of a natural patina. If you favour the original bright finish of your pieces, this is easily restored by use of polishing solution - we recommend Braso or Silvo depending on the metal in question - applied with a soft, clean cloth.

Because each object is cast in small batches, slight variations will occur from one individual piece to another. Production marks may include slight pour ripples or surface pitting, which imprint every item with a unique character.

UPDATED

December 16, 2025

ELBOW WALL LIGHT (NARROW & WIDE)

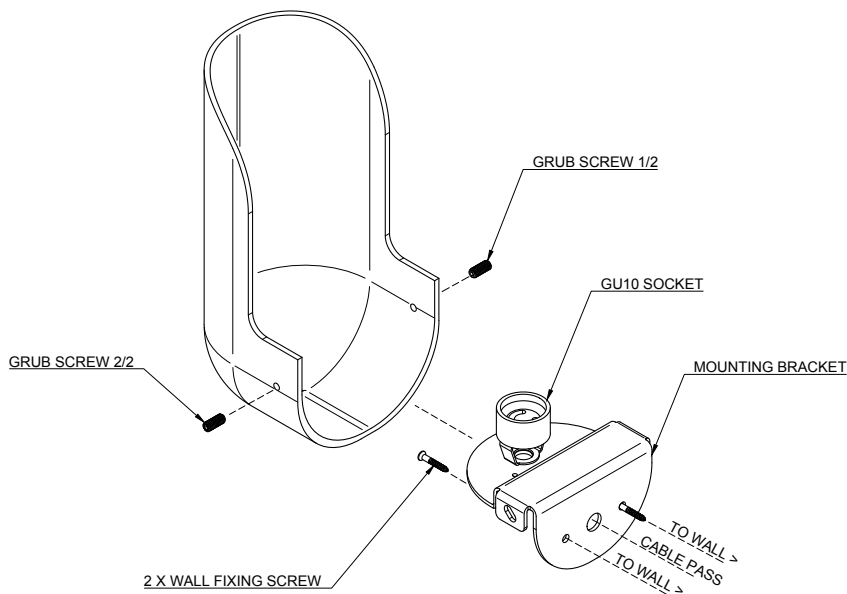

PRODUCT SPECIFICATIONS

AU / UK / EU

LIGHTBULB TYPE
5W (Supplied)

FITTING DESCRIPTION
G9

SUGGESTED LUMEN RATING
400LM

WATTAGE
5w Equiv 50w Incandescent

KELVIN RATING
2700k-3000k Warm White

VOLTAGE
220-240V / 60Hz AC

DIMMABILITY
Yes (Dimmer not supplied)

HARDWIRED LAMPS MUST BE INSTALED BY A PROFESSIONAL.

US / JPN

LIGHTBULB TYPE
5W (Not supplied)

FITTING DESCRIPTION
G9

SUGGESTED LUMEN RATING
400LM

WATTAGE
5w Equiv 50w Incandescent

KELVIN RATING
2700k-3000k Warm White

VOLTAGE
110-120V / 60Hz AC

DIMMABILITY
Yes (Dimmer not supplied)



HARDWIRED LAMPS MUST BE INSTALED BY A PROFESSIONAL.

LISTED PARTS *	
UL Lamp Holder	E3810
UL Cord	ELBZ . E465216
Canda	ELBZ . E465216


ELBOW WALL LIGHT J-BOX INFO

Elbow Wall Light
Junction Box Information

Please Note:
We do not supply junction boxes with the Elbow wall light.
The correct junction box should be sourced by your installing contractor, using the dimensions labeled below.

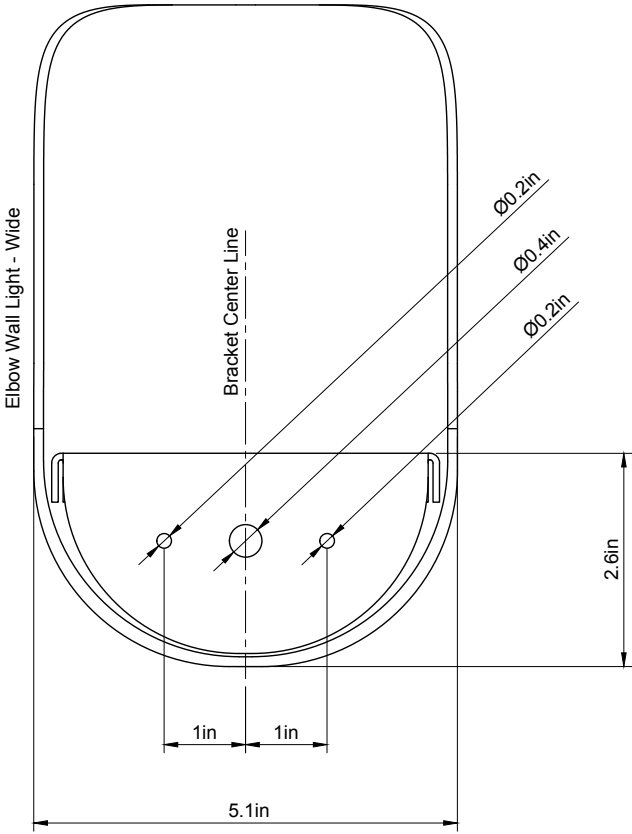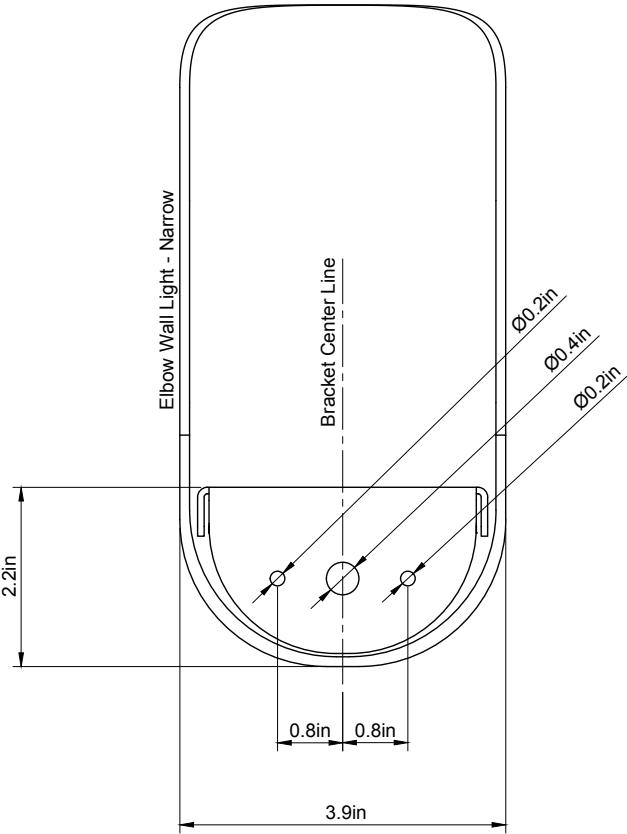

ELBOW WALL LIGHT (OUTDOOR)

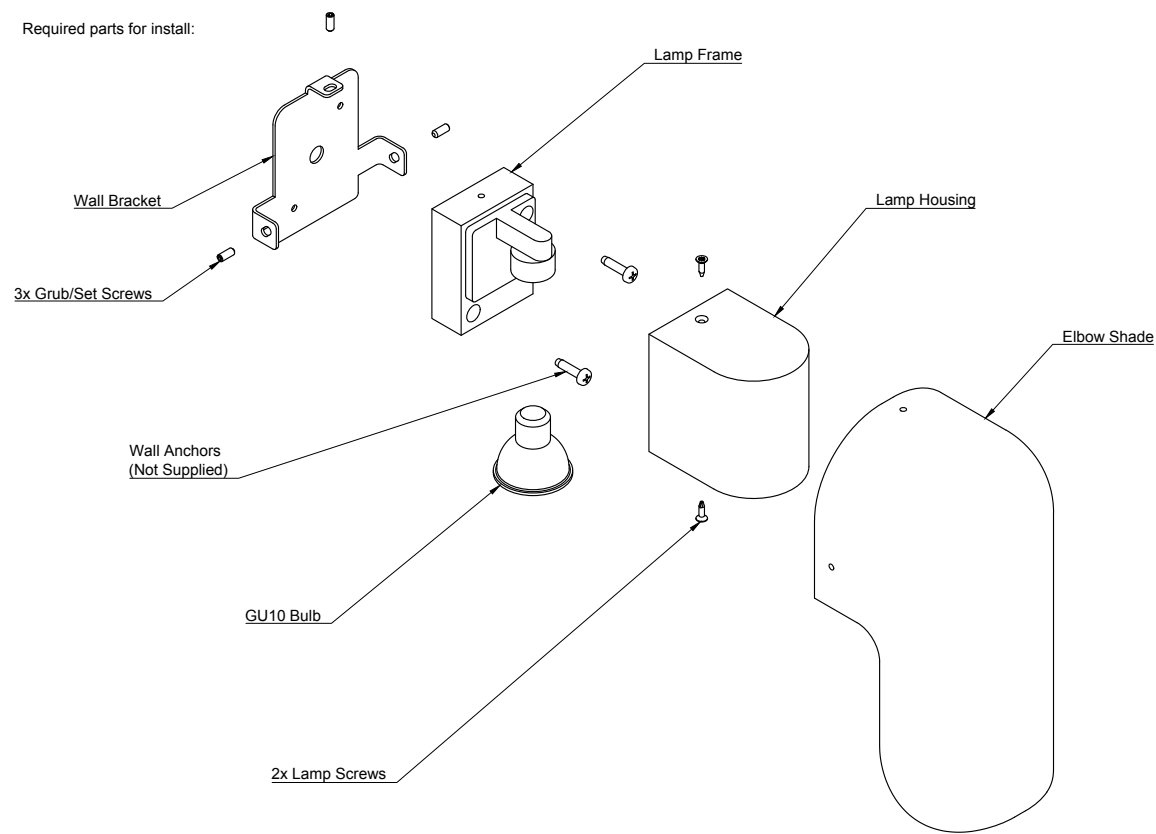

PRODUCT SPECIFICATIONS

AU / UK / EU

LIGHTBULB TYPE
5W (Supplied)

FITTING DESCRIPTION
GU10

SUGGESTED LUMEN RATING
400LM

WATTAGE
5w Equiv 50w Incandescent

KELVIN RATING
2700k-3000k Warm White

VOLTAGE
220-240V / 60Hz AC

DIMMABILITY
Yes (Dimmer not supplied)

**HARDWIRED LAMPS MUST BE INSTALED
BY A PROFESSIONAL.**

US / JPN

LIGHTBULB TYPE
5W (Not supplied)

FITTING DESCRIPTION
GU10

SUGGESTED LUMEN RATING
400LM

WATTAGE
5w Equiv 50w Incandescent


KELVIN RATING
2700k-3000k Warm White

VOLTAGE
110-120V / 60Hz AC

DIMMABILITY
Yes (Dimmer not supplied)

**HARDWIRED LAMPS MUST BE INSTALED
BY A PROFESSIONAL.**

ELBOW WALL (OUTDOOR)

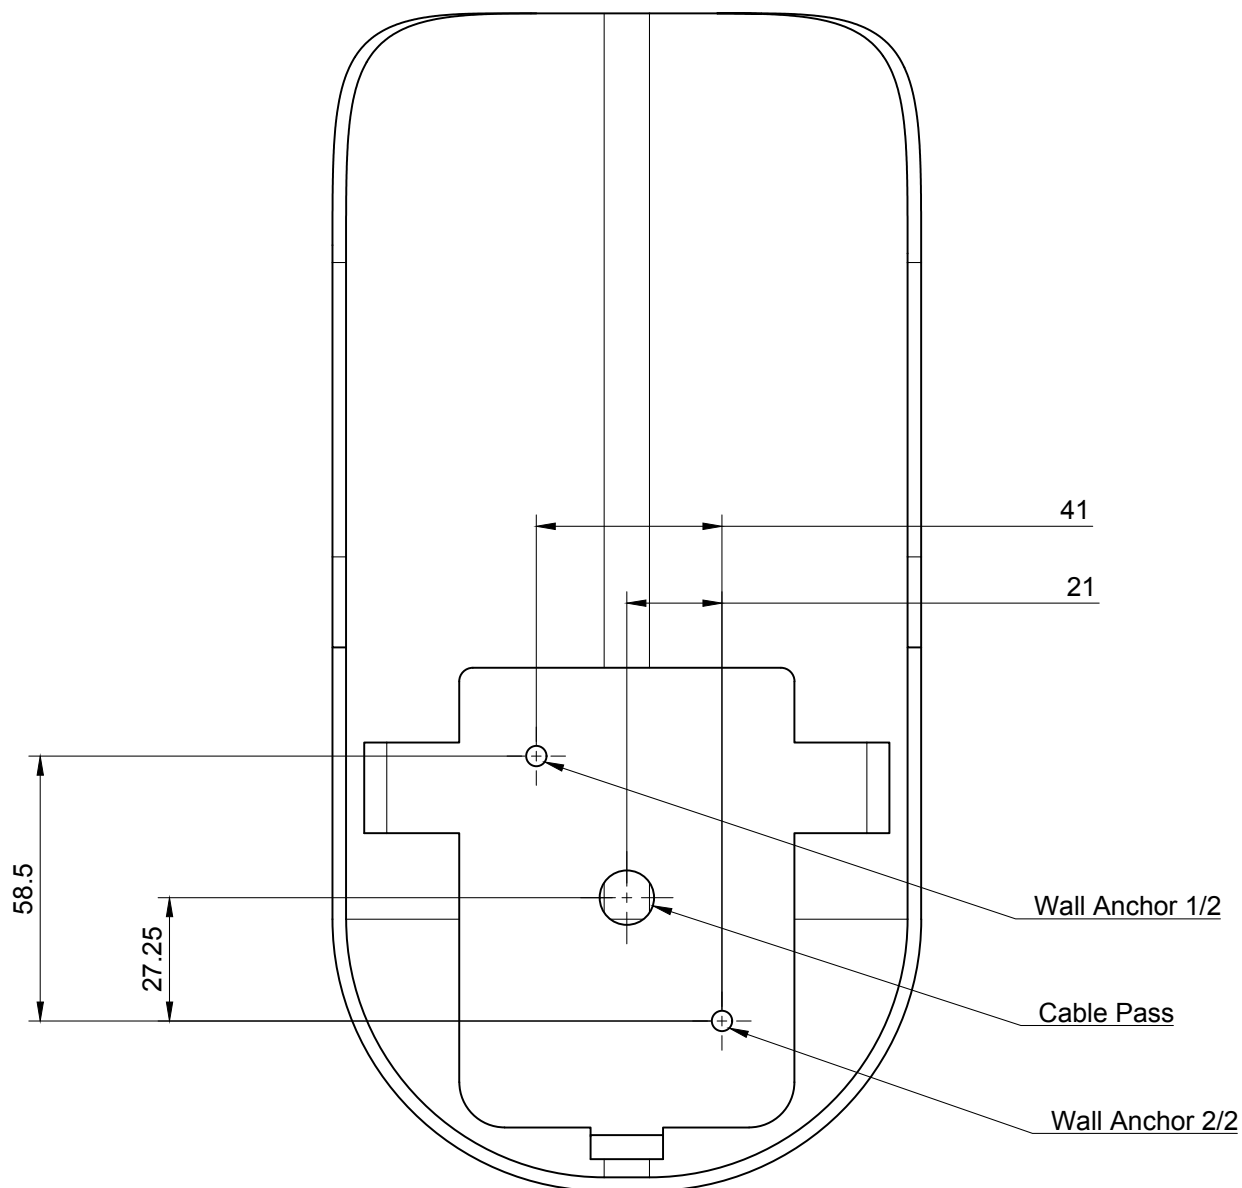

***THE OUTDOOR ELBOW WALL LIGHT IS SUPPLIED WITH IP54 GU10 HOUSING & DOWNLIGHT MOUNTED TO AVOID WATER POOLING INSIDE THE LIGHTING**

Measurements in MM

***INSTALL GUIDE AVAILABLE IN SEPARATE DOCUMENTS**