



ELBOW WALL LIGHT

TECHNICAL SPECIFICATIONS

UPDATED 23 JULY 2026

ELBOW WALL LIGHT




OVERALL DIMENSIONS

I. NARROW
H 205MM × D 95MM × W 100MM
H 8.07IN × D 3.74IN × W 3.93IN

II. WIDE
H 205MM × D 95MM × W 130MM
H 8.07IN × D 3.74IN × W 5.11IN

III. OUTDOOR
H 260MM × D 118MM × W 130MM
H 10.23IN × D 4.64IN × W 5.11IN

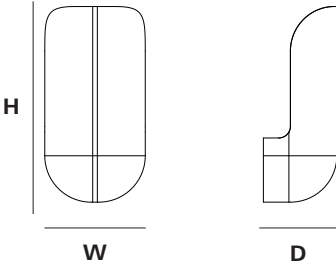


MATERIALS

I. METAL

Aluminium

Brass

Bronze

Blackened

WEIGHT

I. NARROW
Aluminium
(700G / 24.6oz)

Brass / Blackened
(1,500G / 52.91oz)

II. WIDE
Aluminium
(750G / 26.4oz)

Brass / Blackened
(1,550G / 56.43oz)

III. OUTDOOR
Aluminium
(1,000G / 35.27oz)

Brass / Blackened
(2,500G / 88.18oz)

PACKAGING

Recycled Cardboard
H 125MM × L 200MM × W 200MM

CLEANING INSTRUCTIONS

Before cleaning, lighting fixtures must be turned off. Unscrewed the face from the mounting plate for finer cleaning. Whilst cleaning please take care and use the gloves provided.

I. METAL

The metal used for our range oxidise with age and environment, both of which contribute to the evolution of a natural patina. If you favour the original bright finish of your pieces, this is easily restored by use of polishing solution - we recommend Braso or Silvo depending on the metal in question - applied with a soft, clean cloth.

Because each object is cast in small batches, slight variations will occur from one individual piece to another. Production marks may include slight pour ripples or surface pitting, which imprint every item with a unique character.

MATERIALS



Aluminium



Brass



Bronze



Blackened

SIZE / VARIANT



Narrow



Wide



Outdoor

ORIENTATION



Uplight *Standard/Supplied fittings






Downlight *Custom fittings, please specified






Outdoor *Standard Downlight fittings
 *Custom fittings for Uplight, please specified

ELBOW WALL LIGHT DIMENSION

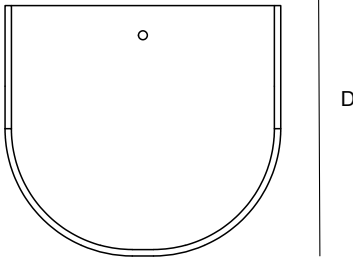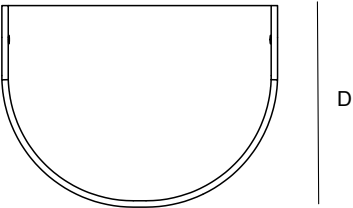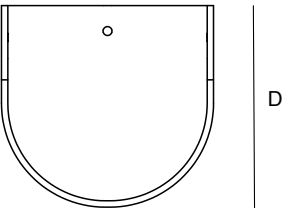


W

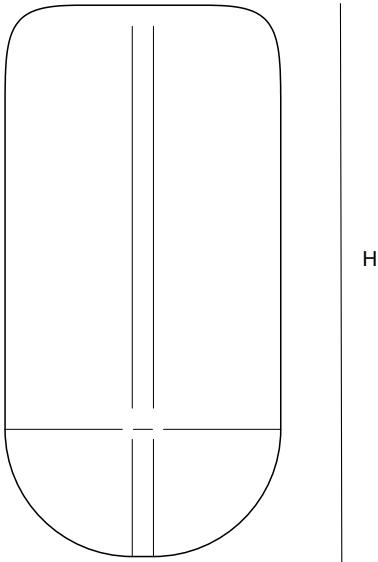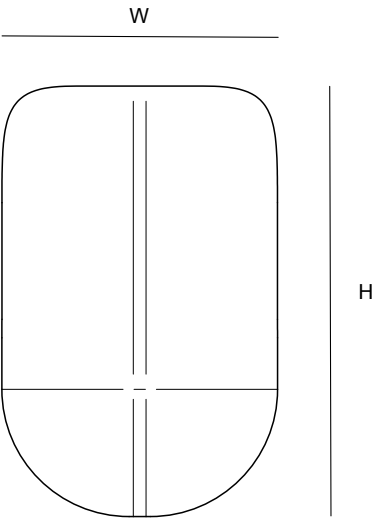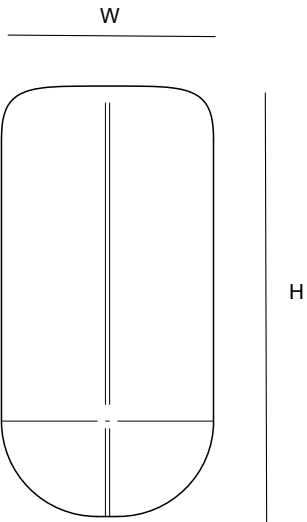

Elbow Narrow
W: 100mm
H: 200mm
D: 95mm


Elbow Wide
W: 130mm
H: 200mm
D: 95mm

Outdoor Elbow
W: 130mm
H: 260mm
D: 118mm

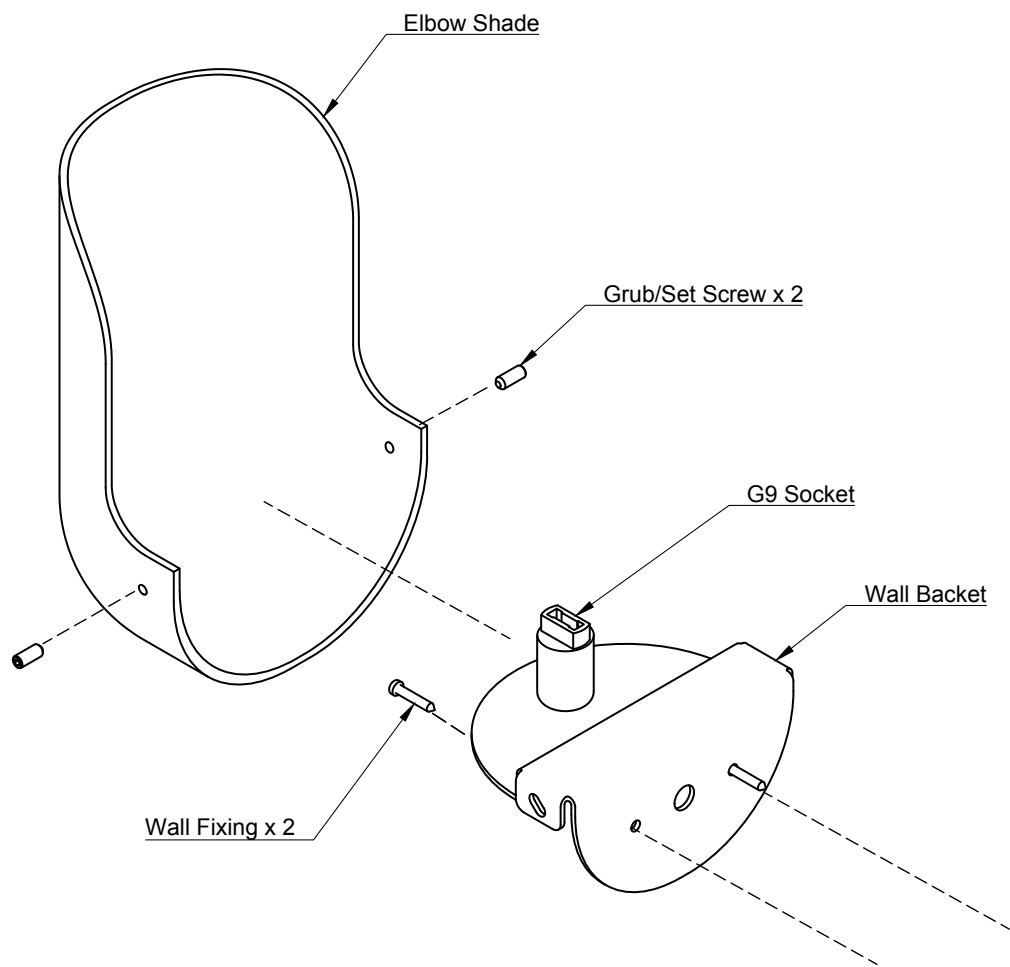

Technical Specifications

LIGHTBULB TYPE	5W (Supplied)	HS CODE LAMPS / LIGHT FITTINGS	9405.10.20
FITTING DESCRIPTION	G9	HS CODE CORD SETS / POWER SUPPLY	ELBZ.E465216
SUGGESTED LUMEN RATING	400LM		
WATTAGE	5w Equiv 50w Incandescent		
KELVIN RATING	2700k-3000k Warm White		
VOLTAGE	220-240V / 60HZ AC		
DIMMABILITY	Yes (Dimmer not supplied)		
		HARDWIRED LAMPS MUST BE	INSTALED BY A PROFESSIONAL.

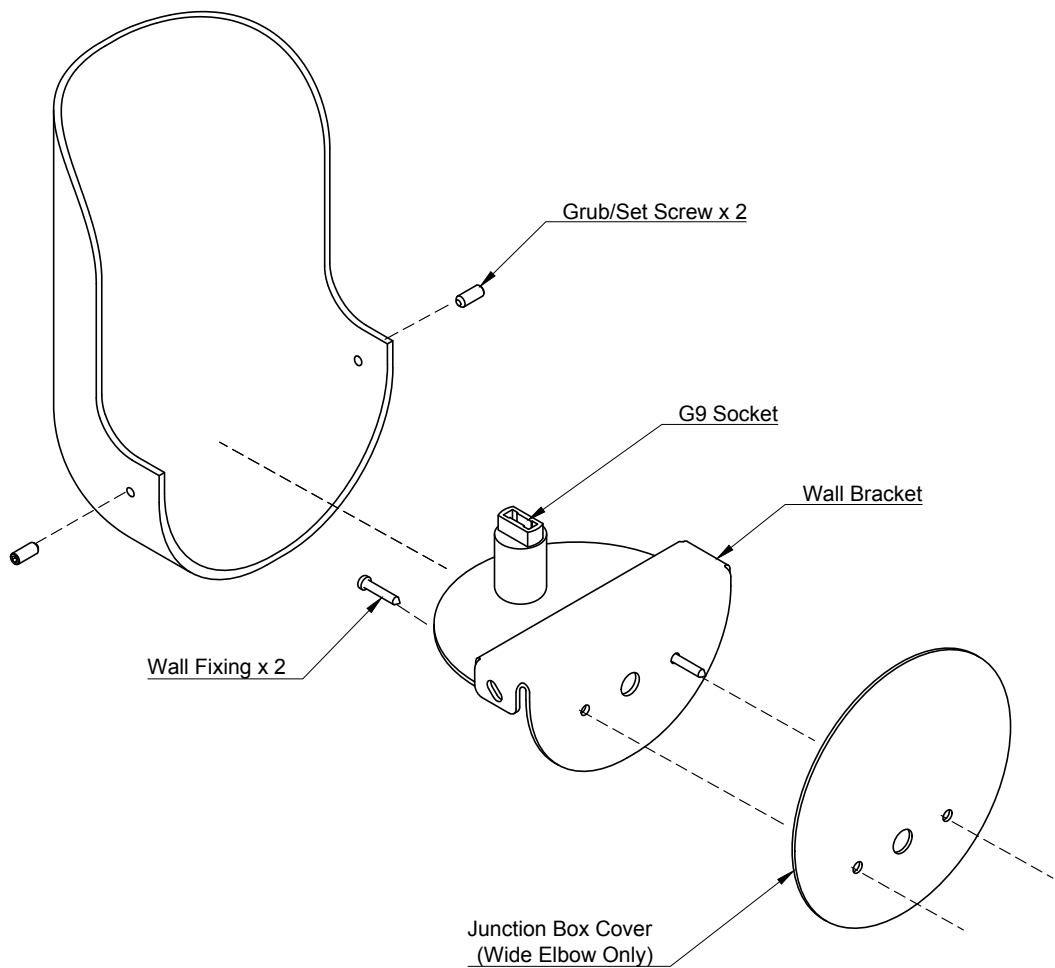



Technical Specifications

LIGHTBULB TYPE 5W (Not supplied)	HS CODE LAMPS / LIGHT FITTINGS 9405.10.20
FITTING DESCRIPTION G9	HS CODE CORD SETS / POWER SUPPLY ELBZ.E465216
SUGGESTED LUMEN RATING 400lm	
WATTAGE 5w Equiv 50w Incandescent	HARDWIRED LAMPS MUST BE INSTALED BY A PROFESSIONAL.
KELVIN RATING 2700k-3000k Warm White	
VOLTAGE 110-120V / 60HZ AC	
dimmability Yes (Dimmer not supplied)	


ELBOW WALL LIGHT J-BOX INFO

Elbow Wall Light
Junction Box Information

Please Note:
We do not supply junction boxes with the Elbow wall light.
The correct junction box should be sourced by your installing contractor, using the dimensions labeled below.

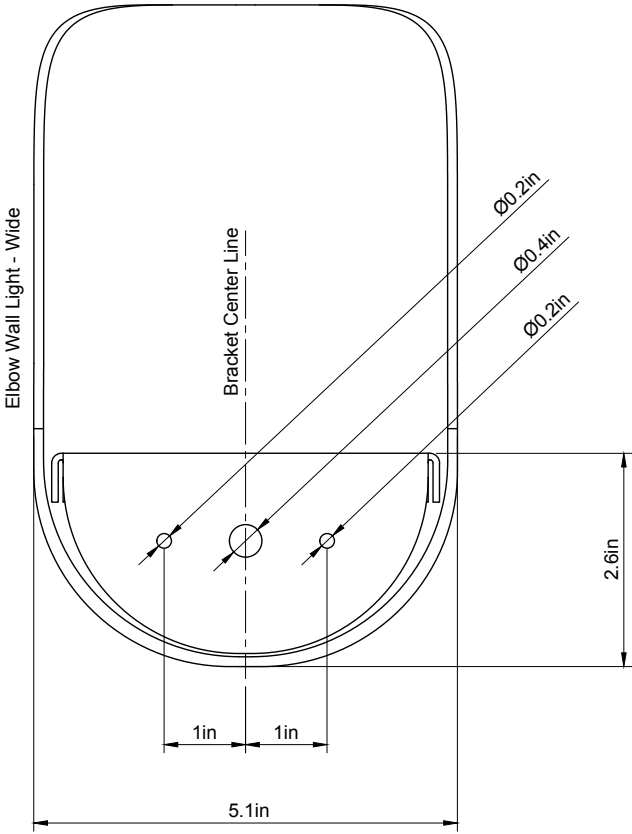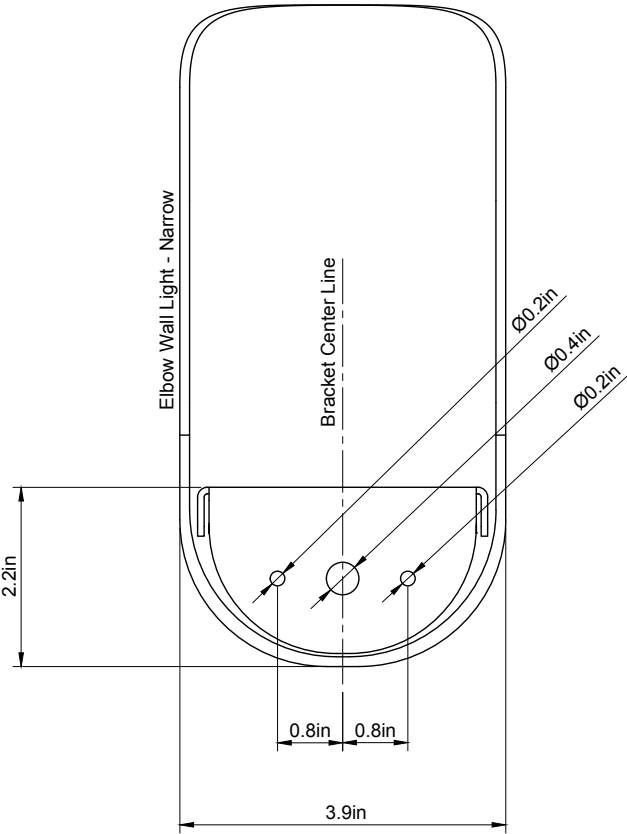

ELBOW WALL LIGHT (OUTDOOR)

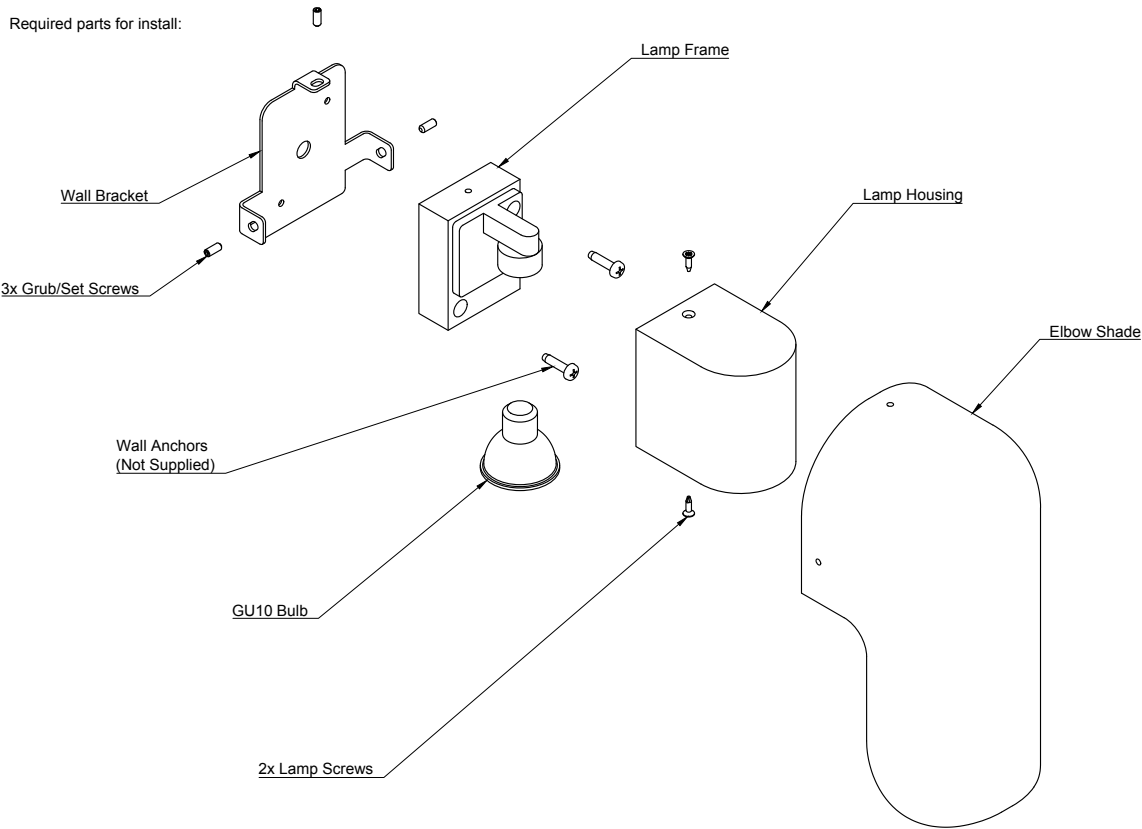

PRODUCT SPECIFICATIONS

AU / UK / EU

LIGHTBULB TYPE
5W (Supplied)

FITTING DESCRIPTION
GU10

SUGGESTED LUMEN RATING
400LM

WATTAGE
5w Equiv 50w Incandescent

KELVIN RATING
2700k-3000k Warm White

VOLTAGE
220-240V / 60HZ AC

DIMMABILITY
Yes (Dimmer not supplied)

US / JPN

LIGHTBULB TYPE
5W (Not supplied)

FITTING DESCRIPTION
GU10

SUGGESTED LUMEN RATING
400LM

WATTAGE
5w Equiv 50w Incandescent

KELVIN RATING
2700k-3000k Warm White

VOLTAGE
110-120V / 60HZ AC


DIMMABILITY
Yes (Dimmer not supplied)

HS CODE LAMPS / LIGHT FITTINGS
9405.10.20

HS CODE CORD SETS / POWER SUPPLY
ELBZ.E465216

HARDWIRED LAMPS MUST BE INSTALED BY A PROFESSIONAL.

ELBOW WALL (OUTDOOR)

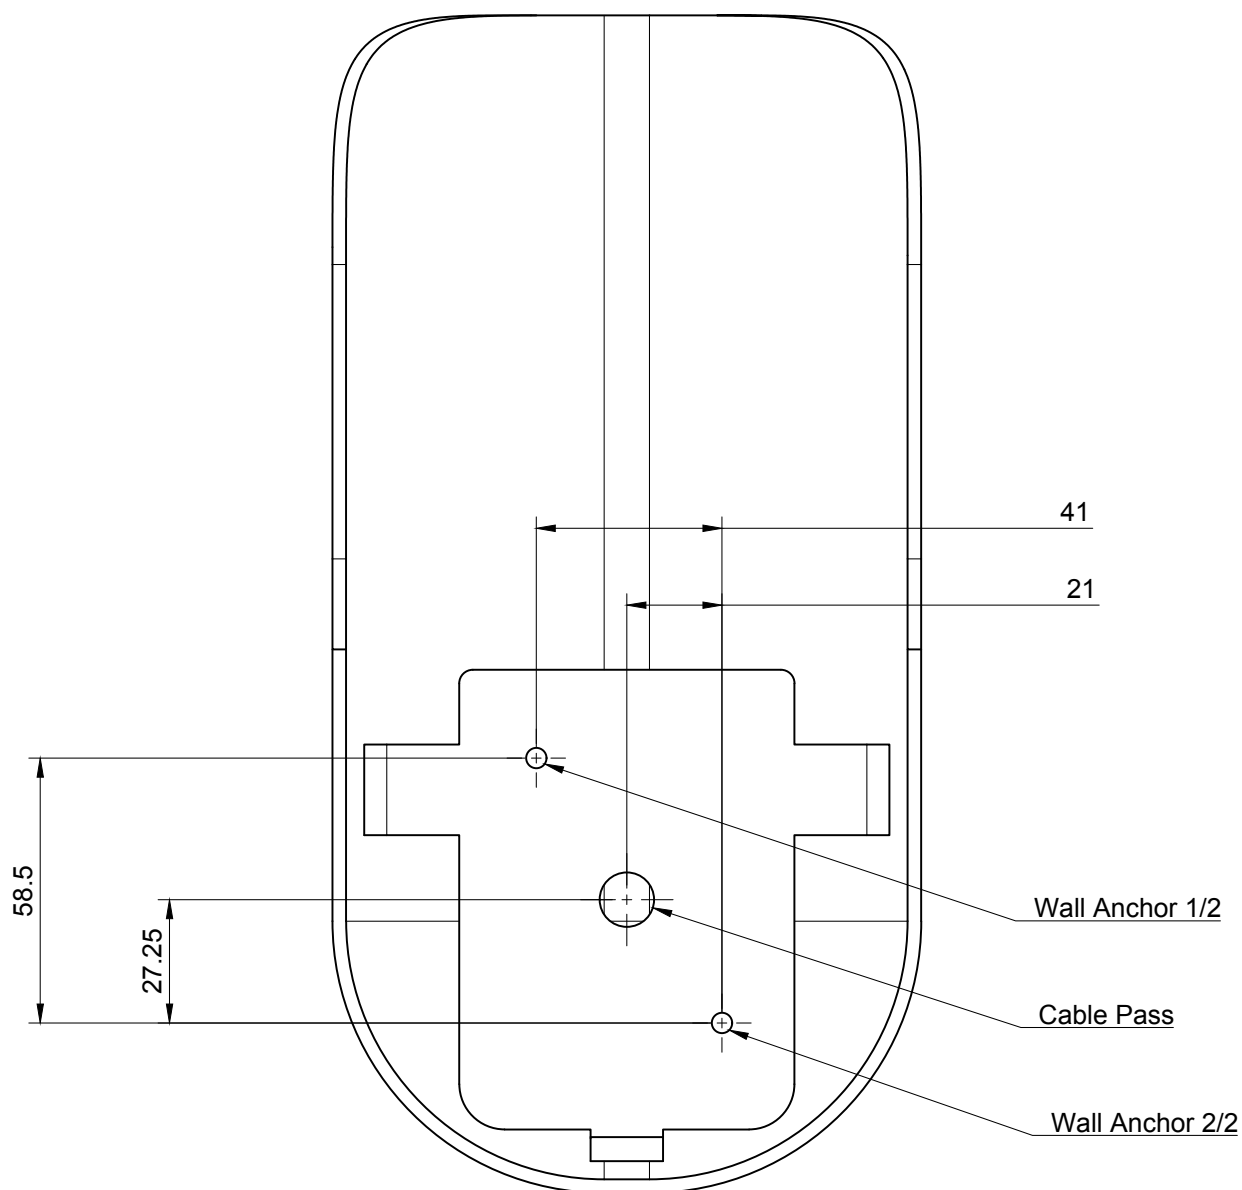

***THE OUTDOOR ELBOW WALL LIGHT IS SUPPLIED WITH IP54 GU10 HOUSING & DOWNLIGHT MOUNTED TO AVOID WATER POOLING INSIDE THE LIGHTING**

Measurements in MM

***INSTALL GUIDE AVAILABLE IN SEPARATE DOCUMENTS**