



OFFSET LAMP 345MM & 445MM

Technical specifications

STUDIO HENRY WILSON



345MM



445MM

OFFSET LAMP

MATERIALS

CLEANING INSTRUCTIONS




OVERALL DIMENSIONS

I. OFFSET 345MM

H 285MM x D 240MM x W 345MM
H 11.22IN x D 9.44IN x W 13.58IN

II. OFFSET 445MM

H 390MM x D 300MM x W 445MM
H 15.35IN x D 11.81IN x W 17.51IN

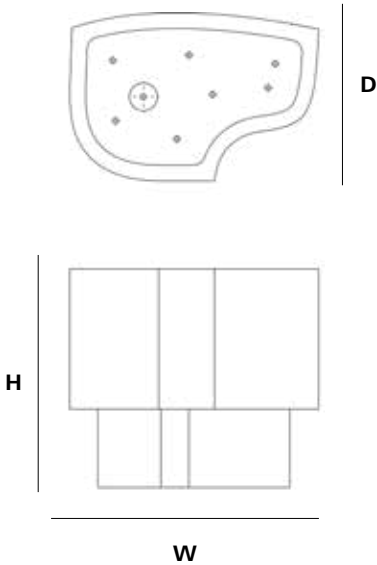

I. STONE



Arabescato



Honey Onyx



Calacatta Viola



Green Guatemala



White Alabaster

WEIGHT

Stone

I. OFFSET 345MM
(1500G / 52.91oz)

II. OFFSET 445MM
(3000G / 105.82oz)

I. STONE


Each of our stone objects is unique, due to the variations of colour and veining that effect the inherent aesthetic appeal of natural stone.

To clean stone items, begin by removing any dust with a soft, dry cloth. A cloth dampened with warm water will usually remove superficial marks; if more effort is necessary, add a modest amount of pH-neutral detergent. Finish by wiping each piece thoroughly with a clean, dry cloth to absorb any residual moisture.

UPDATED

December 16, 2025

OFFSET LAMP 345MM

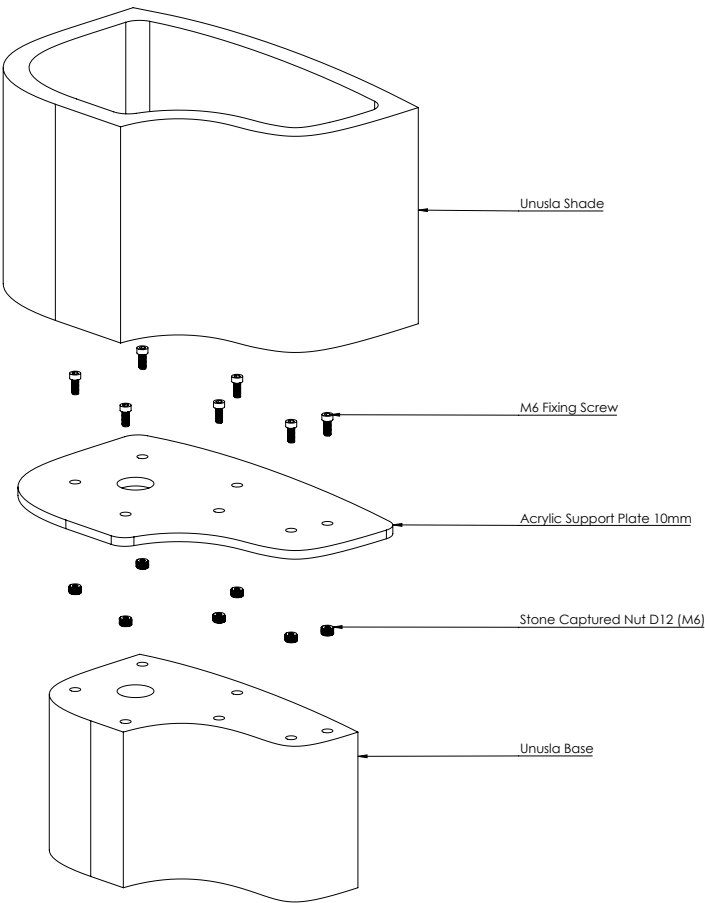

PRODUCT SPECIFICATIONS

AU / UK / EU

LIGHTBULB TYPE
9W LED max (supplied)

FITTING DESCRIPTION
Edison Ø14MM (E14)

SUGGESTED LUMEN RATING
250LM

WATTAGE
3.3w Equiv 25w Incandescent

KELVIN RATING
2700k Warm White

VOLTAGE
220-240v / 50-60Hz

DIMMABILITY
Bulb dependant

IF THE SUPPLIED FLEXIBLE CORD IS
DAMAGED, REPLACE WITH 2 CORE
SHEATHED TYPE ONLY.

US / JPN

LIGHTBULB TYPE
9W LED max (not supplied)

FITTING DESCRIPTION
Edison Ø12MM (E12)

SUGGESTED LUMEN RATING
250LM

WATTAGE
3.3w Equiv 25w Incandescent

KELVIN RATING
2700k-3000k Warm White

VOLTAGE
110-120v / 60Hz AC

DIMMABILITY
Bulb dependant

IF THE SUPPLIED CORD IS DAMAGED,
REPLACE WITH 2 CORE SHEATHED TYPE
ONLY. HARDWIRED LAMPS MUST BE
INSTALED BY A PROFESSIONAL.

HS CODE LAMPS / LIGHT FITTINGS
9405.40.8440


HS CODE CORD SETS / POWER SUPPLY
ELBZ.E465216

LISTED PARTS *
UL Lamp Holder E3810

UL Cord ELBZ . E465216

Canda ELBZ . E465216

OFFSET LAMP 445MM

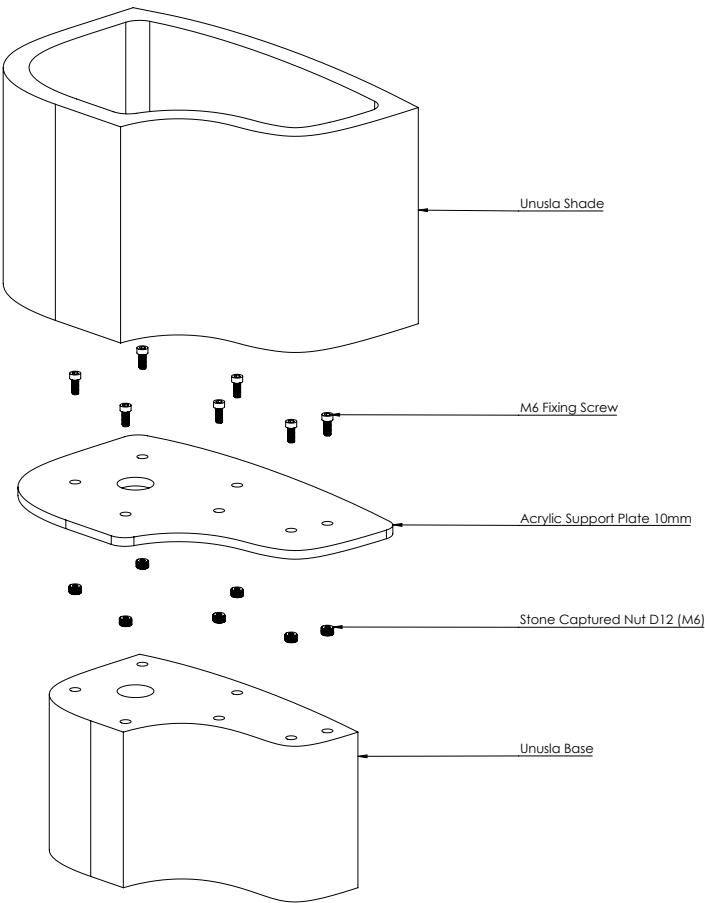

PRODUCT SPECIFICATIONS

AU / UK / EU

LIGHTBULB TYPE
9W LED max (supplied)

FITTING DESCRIPTION
Bayonet Ø22MM (B22)

SUGGESTED LUMEN RATING
250LM

WATTAGE
3.3w Equiv 25w Incandescent

KELVIN RATING
2700k Warm White

VOLTAGE
220-240v / 50-60Hz

DIMMABILITY
Bulb dependant

IF THE SUPPLIED FLEXIBLE CORD IS
DAMAGED, REPLACE WITH 2 CORE
SHEATHED TYPE ONLY.

US / JPN

LIGHTBULB TYPE
9W LED max (not supplied)

FITTING DESCRIPTION
Edison Ø26MM (E26)

SUGGESTED LUMEN RATING
250LM

WATTAGE
3.3w Equiv 25w Incandescent

KELVIN RATING
2700k-3000k Warm White

VOLTAGE
110-120v / 60Hz AC

DIMMABILITY
Bulb dependant

IF THE SUPPLIED CORD IS DAMAGED,
REPLACE WITH 2 CORE SHEATHED TYPE
ONLY. HARDWIRED LAMPS MUST BE
INSTALED BY A PROFESSIONAL.

HS CODE LAMPS / LIGHT FITTINGS
9405.40.8440

HS CODE CORD SETS / POWER SUPPLY
ELBZ.E465216

LISTED PARTS *
UL Lamp Holder E3810

UL Cord ELBZ . E465216

Canda ELBZ . E465216