



PAGODA RÉFLECTEUR

Technical specifications



SMALL (STONE)



LARGE (STONE)



LARGE (TIMBER)


PAGODA RÉFLECTEUR



OVERALL DIMENSIONS

I. SMALL
H 383MM x W 490MM x D 260MM
H 15.07IN x W 19.3IN x D 10.2IN

II. LARGE
H 510MM x W 650MM x D 350MM
H 20IN x W 25.6IN x D 13.7IN



MATERIALS

I. STONE



White Alabaster



Brown Onyx

II. TIMBER



Maple

WEIGHT

I. SMALL
Stone (10,000G / 352.73oz)

II. LARGE
Stone (25,000G / 881.84oz)
Timber (5,000G / 176.36oz)

PACKAGING

Recycled Cardboard
H 145MM x L 440MM x W 400MM

CLEANING INSTRUCTIONS

Before cleaning, lighting fixtures must be turned off and unplugged from mains electricity. Whilst cleaning please take care and use the gloves provided.

I. STONE

Each of our stone objects is unique, due to the variations of colour and veining that effect the inherent aesthetic appeal of natural stone.

To clean stone items, begin by removing any dust with a soft, dry cloth. A cloth dampened with warm water will usually remove superficial marks; if more effort is necessary, add a modest amount of pH-neutral detergent. Finish by wiping each piece thoroughly with a clean, dry cloth to absorb any residual moisture.


II. TIMBER

The carved timber frame is polished and matte-sealed using Danish oil, which nourishes the timber, enhances its grain and protects the surface from dirt and staining. Wipe dry with a clean cloth if necessary.

UPDATED

December 16, 2025

PAGODA RÉFLECTEUR

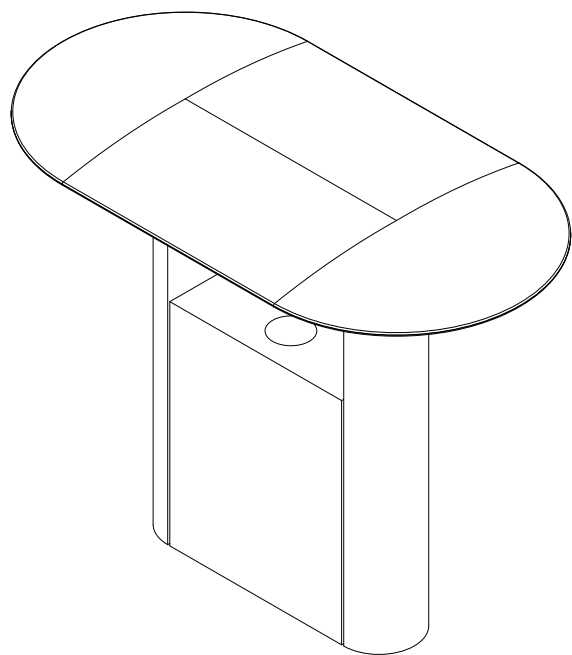

PRODUCT SPECIFICATIONS

AU / UK / EU

LIGHTBULB TYPE
9W LED max (supplied)

FITTING DESCRIPTION
GU10

SUGGESTED LUMEN RATING
250LM

WATTAGE
3.3w Equiv 25w Incandescent

KELVIN RATING
2700k Warm White

VOLTAGE
220-240v / 50-60hz

DIMMABILITY
Bulb dependant / Smart LED bulb
(not supplied)

IF THE SUPPLIED FLEXIBLE CORD IS
DAMAGED, REPLACE WITH 2 CORE
SHEATHED TYPE ONLY.

US / JPN

LIGHTBULB TYPE
9W LED max (not supplied)

FITTING DESCRIPTION
GU10

SUGGESTED LUMEN RATING
250LM

WATTAGE
3.3w Equiv 25w Incandescent

KELVIN RATING
2700k-3000k Warm White

VOLTAGE
110-120v / 60Hz AC

DIMMABILITY
Bulb dependant

IF THE SUPPLIED CORD IS DAMAGED,
REPLACE WITH 2 CORE SHEATHED TYPE
ONLY. HARDWIRED LAMPS MUST BE
INSTALED BY A PROFESSIONAL.

HS CODE LAMPS / LIGHT FITTINGS
9405.40.8440

HS CODE CORD SETS / POWER SUPPLY
ELBZ.E465216

LISTED PARTS *
UL Lamp Holder E3810

UL Cord ELBZ . E465216

Canda ELBZ . E465216