

I. METAL


The metal used for our range oxidise with age and environment, both of which contribute to the evolution of a natural patina. If you favour the original bright finish of your pieces, this is easily restored by use of polishing solution - we recommend Braso or Silvo depending on the metal in question - applied with a soft, clean cloth.

Because each object is cast in small batches, slight variations will occur from one individual piece to another. Production marks may include slight pour ripples or surface pitting, which imprint every item with a unique character.



OVERALL DIMENSIONS

- I. 165MM
- н 180мм × D 120мм × W 165мм
- $H 7.1IN \times D 4.7IN \times W 6.5IN$
- II. 330MM
- н 180мм × р 120мм × w 330мм
- $H 7.1IN \times D 4.7IN \times W 13IN$



I. METAL



Brass



Aluminium



Blackened


WEIGHT

I. 165MM Aluminium (650g / 22.9oz) Brass / Blackened (2,350g / 82.9oz)

II. 330MM Aluminium (1,300g / 45.8oz) Brass / Blackened (4,700g / 165.8oz)

PACKAGING

Recycled Cardboard н 145мм × L 440мм × w 400мм

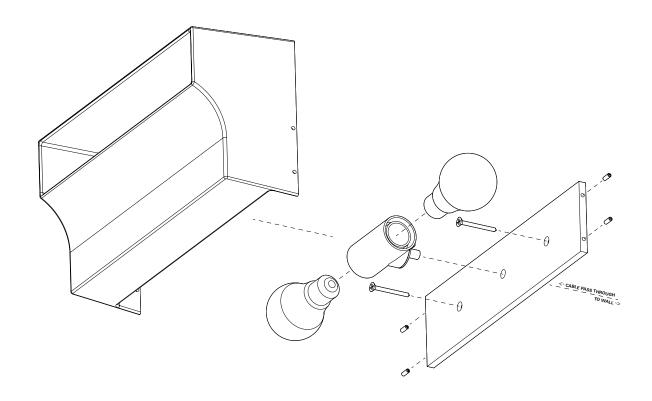

PRODUCT SPECIFICATIONS

AU / UK / EU

LIGHTBULB TYPE
9W LED max (supplied)

FITTING DESCRIPTION
Dual Holder Edison Ø26mm (E26)

SUGGESTED LUMEN RATING 250LM

WATTAGE 3.3w Equiv 25w Incandescent

KELVIN RATING 2700κ Warm White

VOLTAGE 230-240v / 50-60нz

DIMMABILITY

No

IF THE SUPPLIED FLEXIBLE CORD IS DAMAGED, REPLACE WITH 2 CORE SHEATHED TYPE ONLY.

US / JPN

LIGHTBULB TYPE 9W LED max (not supplied)

FITTING DESCRIPTION
Dual Holder Edison Ø26MM (E26)

SUGGESTED LUMEN RATING

WATTAGE

3.3w Equiv 25w Incandescent

KELVIN RATING 2700κ-3000κ Warm White

VOLTAGE 110-120v / 60hz ac

DIMMABILITY Bulb dependant

IF THE SUPPLIED CORD IS DAMAGED, **REPLACE WITH 2 CORE SHEATHED TYPE** ONLY. HARDWIRED LAMPS MUST BE INSTALED BY A PROFESSIONAL.

HS CODE LAMPS / LIGHT FITTINGS 9405.40.8440


HS CODE CORD SETS / POWER SUPPLY ELBZ.E465216

LISTED PARTS *
UL Lamp Holder


E3810

UL Cord ELBZ . E465216

Canda ELBZ . E465216

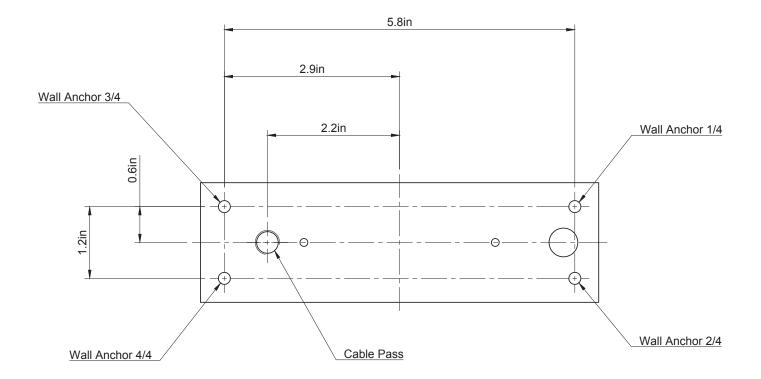

165mm Scoop - Standard Install

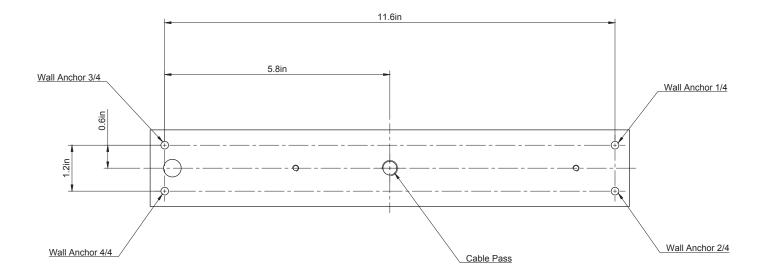

330mm Scoop - Standard Install