



SHIELD WALL LIGHT

TECHNICAL SPECIFICATIONS

UPDATED 11 AUGUST 2026


SHIELD WALL LIGHT



OVERALL DIMENSIONS


Landscape

H 185MM x D 63MM x W 180MM
H 7.28IN x D 2.48IN x W 7.1IN




Potrait

H 220MM x D 63MM x W 115MM
H 8.66IN x D 2.48IN x W 4.52IN



MATERIALS

I. METAL

Aluminium

Nickel Plated

Brass

Blackened

WEIGHT

Aluminium
(600g / 21oz)

Brass / Blackened
(3,000g / 105.8oz)

CLEANING INSTRUCTIONS

I. METAL


The metal used for our range oxidise with age and environment, both of which contribute to the evolution of a natural patina. If you favour the original bright finish of your pieces, this is easily restored by use of polishing solution - we recommend Braso or Silvo depending on the metal in question - applied with a soft, clean cloth.

Because each object is cast in small batches, slight variations will occur from one individual piece to another. Production marks may include slight pour ripples or surface pitting, which imprint every item with a unique character.

MATERIALS



Bronze

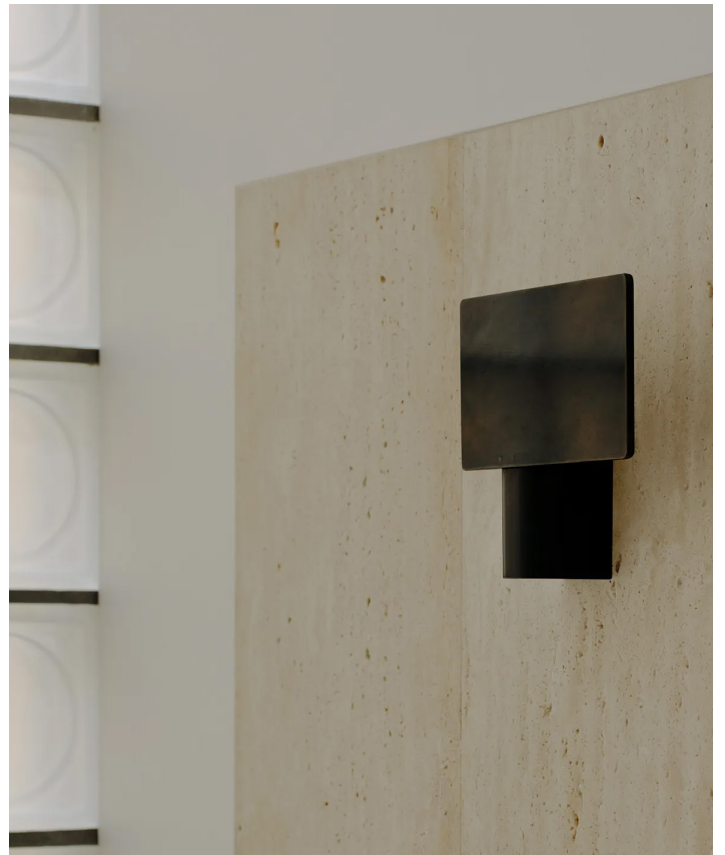

Blackened



Nickel Plated



Aluminium

ORIENTATION



Portrait - *Custom orientation, please specified


Example on the next page




Landscape - Default orientation

Example on the next page


SHIELD WALL LIGHT ORIENTATION




Vertical + Left Orientation




Vertical + Right Orientation



Horizontal + Left Orientation




Horizontal + Right Orientation

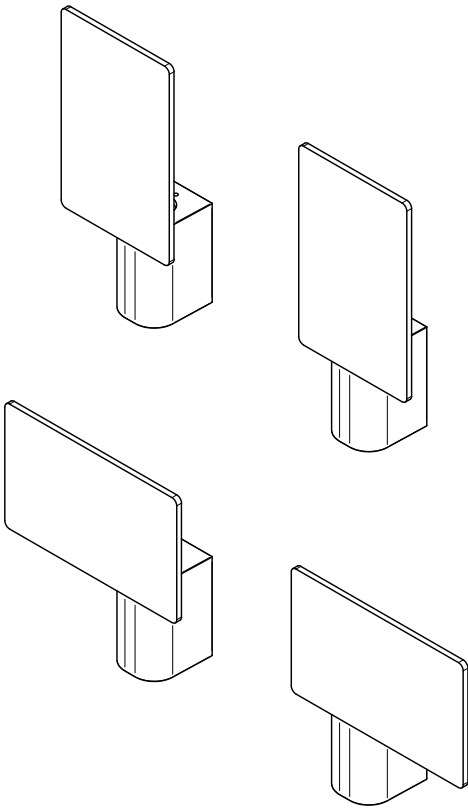

***Please specified desired orientation**

SHIELD WALL LIGHT

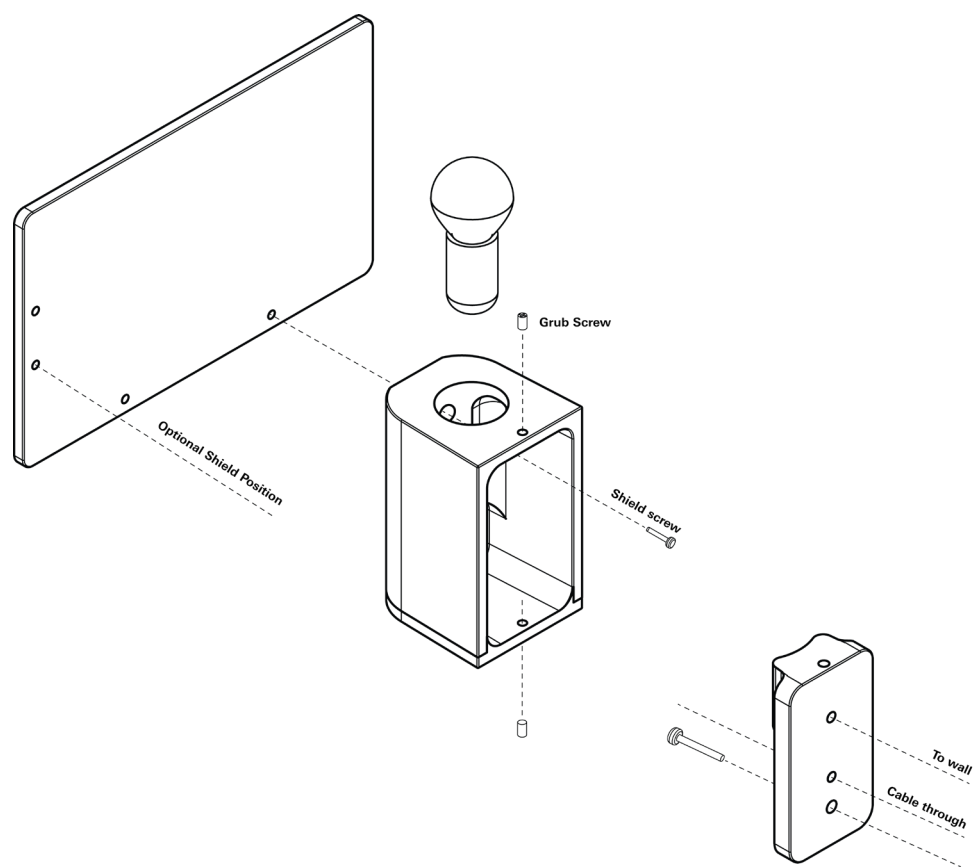

PRODUCT SPECIFICATIONS

AU / UK / EU

LIGHTBULB TYPE
9W LED max (supplied)

FITTING DESCRIPTION
Edison Ø14MM (E14)

SUGGESTED LUMEN RATING
250LM

WATTAGE
3.3w Equiv 25w Incandescent

KELVIN RATING
2700k Warm White

VOLTAGE
230-240v / 50-60Hz

DIMMABILITY
Bulb dependant / Smart LED Bulb
(not supplied)

IF THE SUPPLIED FLEXIBLE CORD IS
DAMAGED, REPLACE WITH 2 CORE
SHEATHED TYPE ONLY.

US / JPN

LIGHTBULB TYPE
9W LED max (not supplied)

FITTING DESCRIPTION
Edison Ø12MM (E12)

SUGGESTED LUMEN RATING
250LM

WATTAGE
3.3w Equiv 25w Incandescent

KELVIN RATING
2700k-3000k Warm White

VOLTAGE
110-120v / 60Hz AC

DIMMABILITY
Bulb dependant

IF THE SUPPLIED CORD IS DAMAGED,
REPLACE WITH 2 CORE SHEATHED TYPE
ONLY. HARDWIRED LAMPS MUST BE
INSTALED BY A PROFESSIONAL.

HS CODE LAMPS / LIGHT FITTINGS
9405.40.8440

HS CODE CORD SETS / POWER SUPPLY
ELBZ.E465216

LISTED PARTS *	
UL Lamp Holder	E3810
UL Cord	ELBZ . E465216
Canda	ELBZ . E465216